



AISI-LINE

TACTILE SURFACE GUIDING LINES

AISI - LINE

Individual tactile surface guiding lines /guiding strips/

Product description

Individual **tactile surface guiding lines /tactile guiding strips/** in shape of longitudinal ribs are made of **stainless steel** and ensure long lasting stable performance. They are also characterized by: good resistance to corrosion, abrasion, excellent resistance to weathering, ozone, sunlight and oxidation.

Tactile surface guiding lines /tactile guiding strips/ are made with pins and without pins in a variety of designs with a possible plastic insert inserted into the product.

The system has already proved good in train stations, banks, universities, entrance areas, etc.



PURPOSE OF USE

AISI-LINE

Tactile surface guiding lines /tactile guiding strips/ with a design of longitudinal projections in shape of ribs in a colour contrasting with the colour of the surrounding surface and functional arrangement of the longitudinal strips /ribs/ on the ground provide directional guidance.

Tactile surface guiding lines allow you to build guidance on the ground that is recognizable by feet and white cane and can be also detected visually.


Tactile surface guiding lines help blind and visually impaired people to find their way with help of a longitudinal design. **Tactile surface guiding lines** enable blind and visually impaired people to quickly and safely get from the starting point to their place of destination.



Structure of the guideline

Individual **tactile surface guiding lines /tactile guiding strips/** fit harmoniously into the existing architecture and break the concept in an attractive way.

VARIANTS:

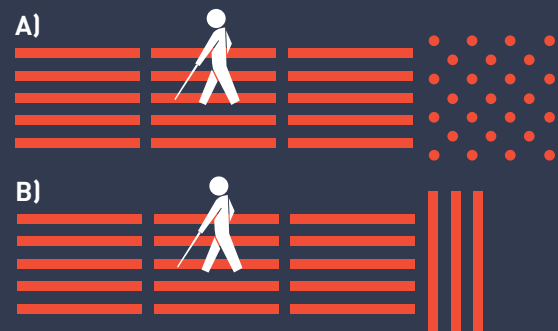

PRODUCT FEATURES OF /AISI-LINE/

- Minimal impact on staff/pedestrians during installation
- Quick and easy installation using a template on all surfaces, including concrete, ceramic tiles, asphalt, wood floors and most other surfaces
- Embossed anti-slip surface, safe and non-slip
- Long-lasting product performance, impact resistant
- Low maintenance demands
- Walking possible immediately after installation, by full load after 24 hours
- They are modular and their universality allows endless configurations to adapt to new or existing surfaces and styles of design
- AISI-LINE has a height of 3.5 and 5 mm, which ensures that there will be never any danger on the road
- Stainless steel ensures stability and durability of the product indoors and outdoors
- AISI-LINE offers the specifiers the possibility to maintain the aesthetics of the substrate without limitation of tactile performance



LUMINANCE CONTRAST

In line with international and European standards the luminance contrast between the tactile surface warning studs and the surrounding substrate must be minimum 30%. AISI-LINE is available in a variety of colour inserts that allow specifiers to choose the most appropriate contrast values for a given installation.


COLOURS

Choose the colour of the filling

Individual tactile surface guiding lines /tactile guiding strips/ are available in a number of standard and the most commonly used colours.



red




black



grey



white



yellow

Customers can also request a custom colour (with respect to the minimum amount) in order to make the tactile studs and strips fit into any design, style and colour scheme.

of tactile surface guiding lines /strips/

Versatile and flexible

Enormous variability and flexibility of individual tactile surface guiding lines /tactile guiding strips/ means, that they can be easily fitted into almost any construction without limitation of creative design and architecture. Whether used in new or old constructions, they work exactly the same way.

According to the law


against discrimination of the blind and visually impaired, it is required to ensure the placement of tactile surface guiding lines /tactile guiding strips/ in internal and external areas open to the public.

Tactile surface guiding lines /tactile guiding strips/

are placed in places with movement of people (such as lobbies, stations, subway, hospitals, shopping centres, squares, courtyards,...), and in all areas, which are described in your country's ordinance.

Tactile surface guiding lines /tactile guiding strips/

are installed on any surface such as:-wood, marble, granite, asphalt, concrete, tile, PVC and other materials, with widths according to the decree of the country.

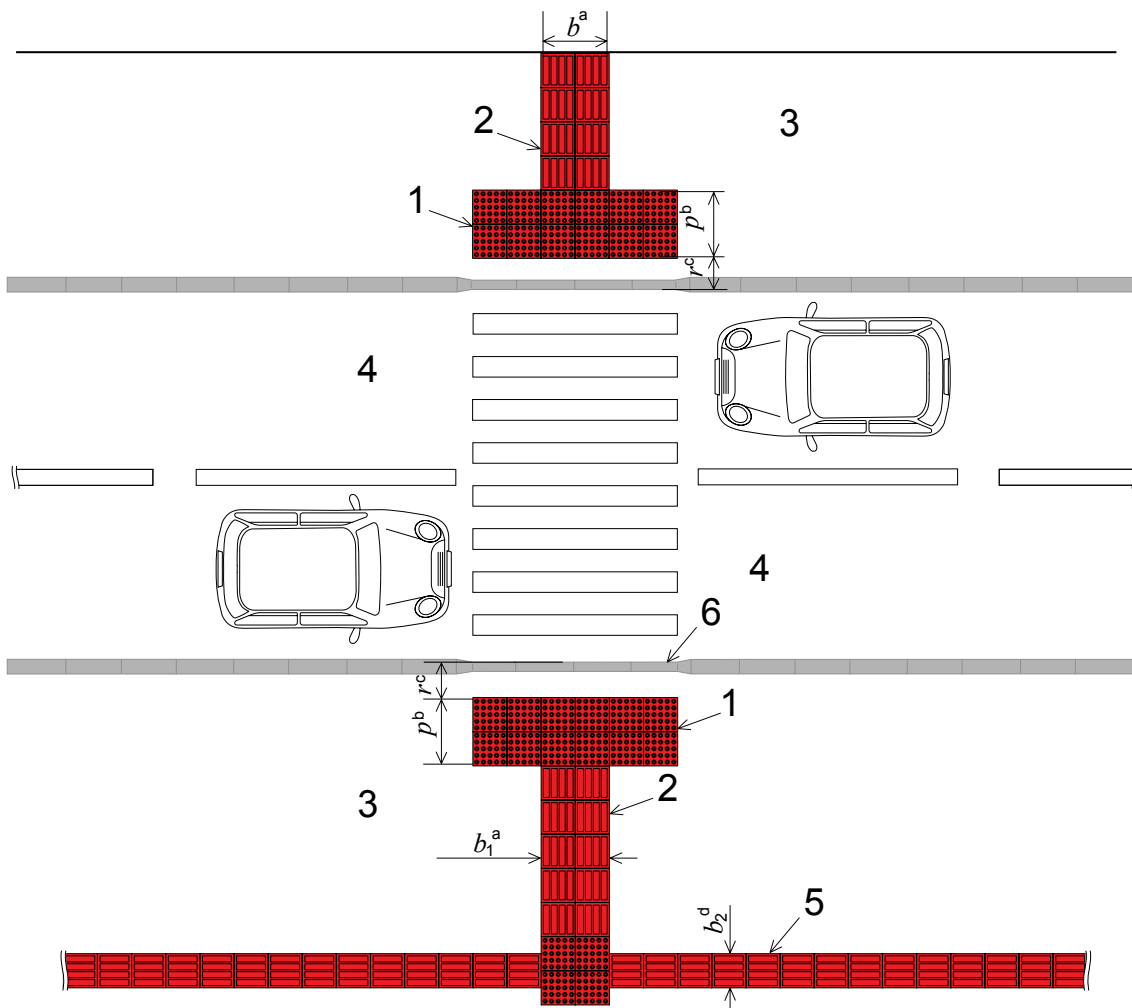

LIST OF INDIVIDUAL TACTILE SURFACE GUIDING LINES FROM STAINLESS STEEL



AISI/PD



AISI/P1




AISI/P1-P



AISI/P1-P



AISI/P1-P

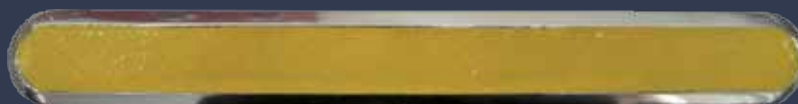

AISI/P1-P



AISI/P2-P



AISI/P2-P



AISI/P2-P



AISI/P2-P

AISI/PD

Individual tactile surface guiding lines /guiding strips/ from stainless steel

Individual **tactile surface guiding lines** in shape of longitudinal ribs are made from **stainless steel** and ensure long lasting stable performance.



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/PD	35x280mm	5mm	with pin	280g	stainless steel		AISI/PD-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/PD/35/280/5

AISI/P1



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P1	35x280mm	5mm	with pin	280g	stainless steel		AISI/P1-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P1/35/280/5

AISI/P1-P

Individual tactile surface guiding lines /guiding strips/ from stainless steel with plastic filling

Individual **tactile surface guiding lines** in shape of longitudinal ribs are made from **stainless steel** and ensure long lasting stable performance.



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P1-P	35x280mm	5mm	with pin	280g	stainless steel	■	AISI/P1-P-BL-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel	■	AISI/P1-P-BL/35/280/5
	35x280mm	3,5mm	with pin	280g	stainless steel	■	AISI/P1-P-BL-K 35/280/3,5
	35x280mm	3,5mm	without pin	276g	stainless steel	■	AISI/P1-P-BL/35/280/3,5
	16x280mm	3mm	with pin	140g	stainless steel	■	AISI/P1-P-BL-K/16/280/3
	16x280mm	3mm	without pin	135g	stainless steel	■	AISI/P1-P-BL/16/280/3



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P1-P	35x280mm	5mm	with pin	280g	stainless steel	■	AISI/P1-P-GR-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel	■	AISI/P1-P-GR/35/280/5
	35x280mm	3,5mm	with pin	276g	stainless steel	■	AISI/P1-P-GR-K/35/280/3,5
	35x280mm	3,5mm	without pin	274g	stainless steel	■	AISI/P1-P-GR/35/280/3,5
	16x280mm	3mm	with pin	140g	stainless steel	■	AISI/P1-P-GR-K/16/280/3
	16x280mm	3mm	without pin	135g	stainless steel	■	AISI/P1-P-GR/16/280/3

AISI/P1-P









AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P1-P	35x280mm	5mm	with pin	280g	stainless steel		AISI/P1-P-RE-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P1-P-RE/35/280/5
	35x280mm	3,5mm	with pin	276g	stainless steel		AISI/P1-P-RE-K/35/280/3,5
	35x280mm	3,5mm	without pin	274g	stainless steel		AISI/P1-P-RE/35/280/3,5
	16x280mm	3mm	with pin	140g	stainless steel		AISI/P1-P-RE-K/16/280/3
	16x280mm	3mm	without pin	135g	stainless steel		AISI/P1-P-RE/16/280/3



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P1-P	35x280mm	5mm	with pin	280g	stainless steel		AISI/P1-P-YE-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P1-P-YE/35/280/5
	35x280mm	3,5mm	with pin	276g	stainless steel		AISI/P1-P-YE-K/35/280/3,5
	35x280mm	3,5mm	without pin	274g	stainless steel		AISI/P1-P-YE/35/280/3,5
	16x280mm	3mm	with pin	140g	stainless steel		AISI/P1-P-YE-K/16/280/3
	16x280mm	3mm	without pin	135g	stainless steel		AISI/P1-P-YE/16/280/3





AISI/P2-P

Individual tactile surface guiding lines /guiding strips/ from stainless steel with plastic filling

Individual **tactile surface guiding lines** in shape of longitudinal ribs are made of **stainless steel** and ensure long lasting stable performance







AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P2-P	35x280mm	5mm	with pin	280g	stainless steel		AISI/P2-P-BL-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P2-P-BL/35/280/5
	35x280mm	3,5mm	with pin	280g	stainless steel		AISI/P2-P-BL-K/35/280/3,5
	35x280mm	3,5mm	without pin	276g	stainless steel		AISI/P2-P-BL/35/280/3,5




AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P2-P	35x280mm	5mm	with pin	280g	stainless steel		AISI/P2-P-GR-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P2-P-GR/35/280/5
	35x280mm	3,5mm	with pin	276g	stainless steel		AISI/P2-P-GR-K/35/280/3,5
	35x280mm	3,5mm	without pin	274g	stainless steel		AISI/P2-P-GR/35/280/3,5

AISI/P2-P



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P2-P	35x280mm	5mm	with pin	280g	stainless steel		AISI/P2-P-RE-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P2-P-RE/35/280/5
	35x280mm	3,5mm	with pin	276g	stainless steel		AISI/P2-P-RE-K/35/280/3,5
	35x280mm	3,5mm	without pin	274g	stainless steel		AISI/P2-P-RE/35/280/3,5



AISI-LINE / INDIVIDUAL TACTILE SURFACE GUIDING LINES /GUIDING STRIPS/ WITH PLASTIC FILLING

MODEL	DIMENSION	HEIGHT	PRODUCT	WEIGHT	MATERIAL	COLOUR	PRODUCT CODE
AISI/P2-P	35x280mm	5mm	with pin	280g	stainless steel		AISI/P2-P-YE-K/35/280/5
	35x280mm	5mm	without pin	276g	stainless steel		AISI/P2-P-YE/35/280/5
	35x280mm	3,5mm	with pin	280g	stainless steel		AISI/P2-P-YE-K/35/280/3,5
	35x280mm	3,5mm	without pin	276g	stainless steel		AISI/P2-P-YE/35/280/3,5

They are designed to meet international and European standards.



/Individual tactile surface guiding lines /guiding strips/ are produced with the following dimensions:/

ISO 23599

Individual tactile surface guiding lines /guiding strips/ from stainless steel with pin

1. AISI-PD-K/35/280/5; AISI-P1-K/35/280/5;
AISI-P1-P-K/35/280/5

2. AISI-P1-K/35/280/3,5; AISI-P1-P-K/35/280/3,5

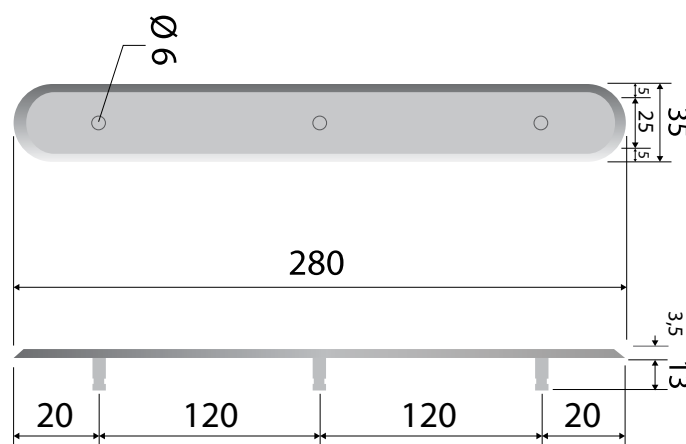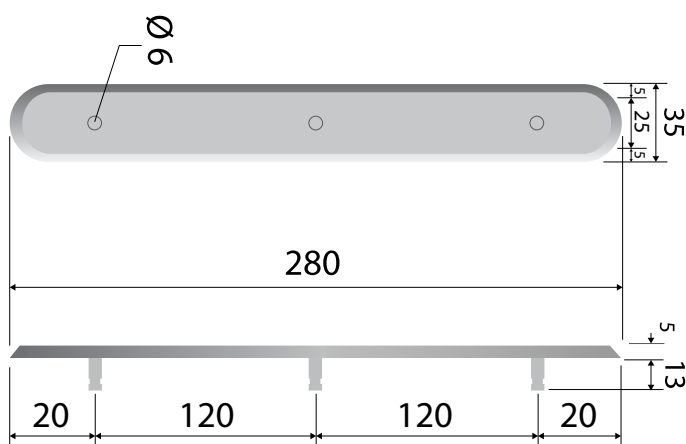



MATERIAL: stainless steel

INSTALLATION: drilling/sticking

Individual tactile surface guiding lines /guiding strips/ from stainless steel without pin

1. AISI-PD/35/280/5; AISI-P1/35/280/5;
AISI-P1-P/35/280/5

2. AISI-P1/35/280/3,5; AISI-P1-P/35/280/3,5

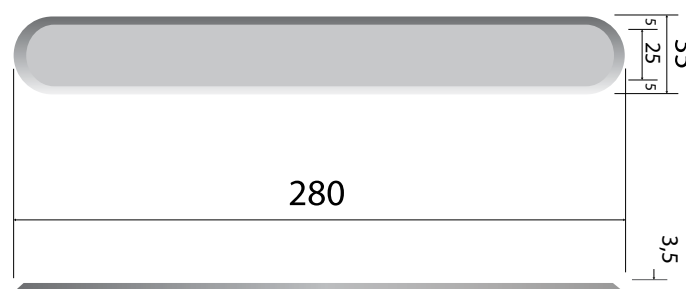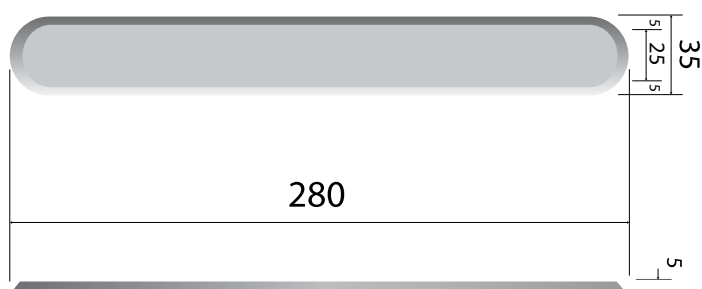

MATERIAL: stainless steel

INSTALLATION: sticking


They are designed to meet international and European standards.

/Individual tactile surface guiding lines /guiding strips/ are produced with the following dimensions:/

ISO 23599

Individual tactile surface guiding lines /guiding strips/ from stainless steel with pin

1. AISI-P1-P-K/16/280/3

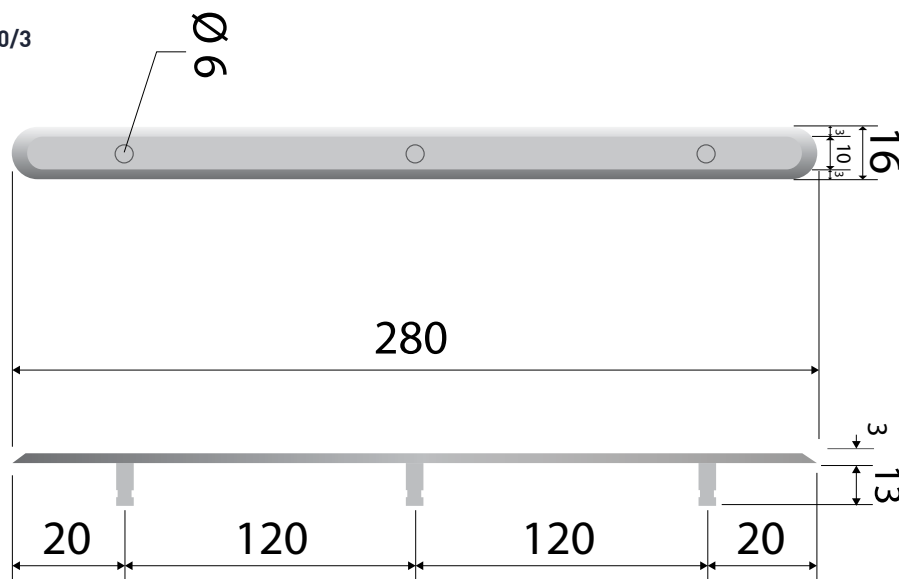


MATERIAL: stainless steel

INSTALLATION: drilling/sticking

Individual tactile surface guiding lines /guiding strips/ from stainless steel without pin

1. AISI-P1-P/16/280/3

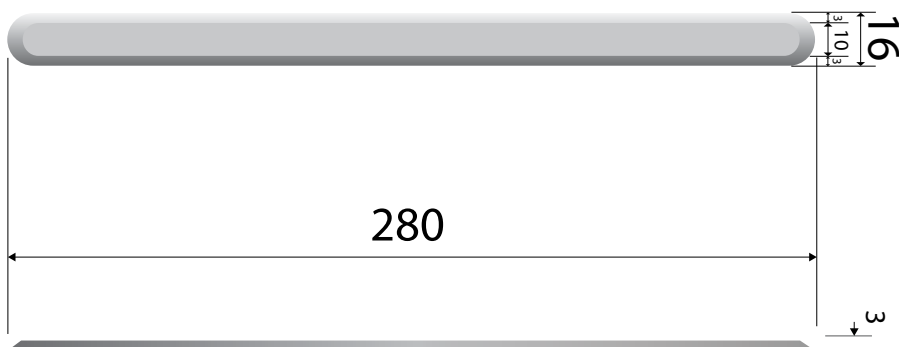

MATERIAL: stainless steel

INSTALLATION: sticking


They are designed to meet international and European standards.

/Individual tactile surface guiding lines /guiding strips/ are produced with the following dimensions:/


ISO 23599

Individual tactile surface guiding lines /guiding strips/ from stainless steel with pin

1. AISI-P2-P-K/35/280/5

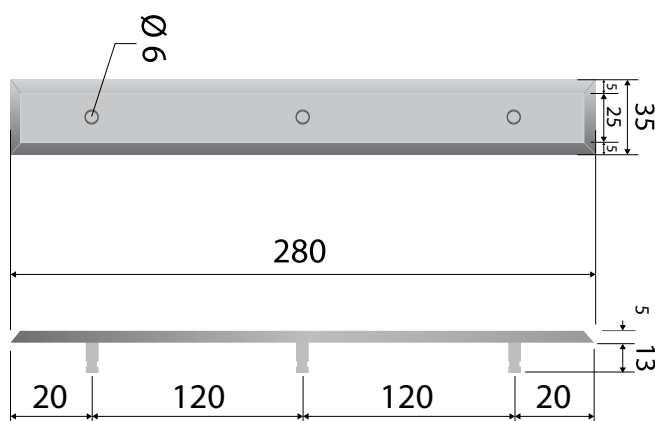

2. AISI-P2-P-K/35/280/3,5

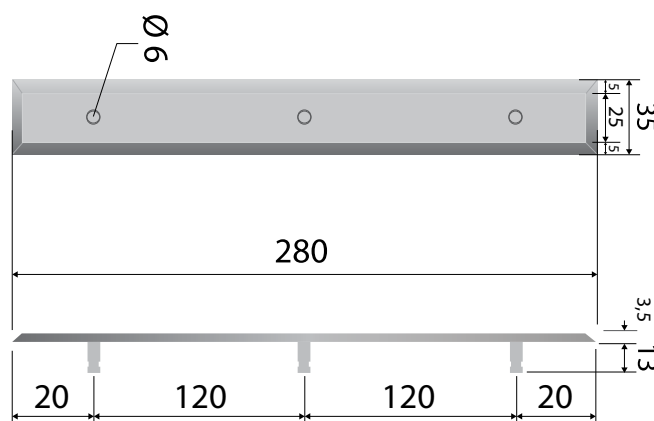


MATERIAL: stainless steel


INSTALLATION: drilling/sticking

Individual tactile surface guiding lines /guiding strips/ from stainless steel without pin

1. AISI-P2-P-K/35/280/5

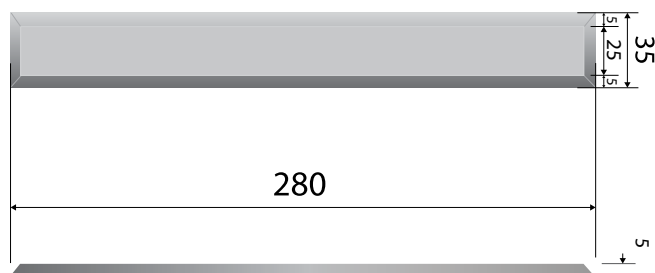

2. AISI-P2-P-K/35/280/3,5

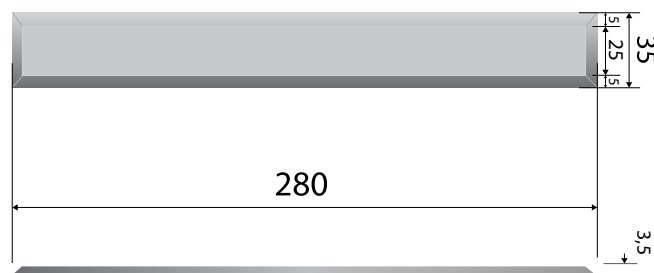

MATERIAL: stainless steel

INSTALLATION: sticking

SAMPLE IMPLEMENTATIONS



AISI-LINE

IMPLEMENTATION - railway station Senica /Slovakia/



IMPLEMENTATION - Önorm



IMPLEMENTATION - Judicial Centre Korneuburg /Austria/





OLEJÁR, spol. s.r.o.

086 36, Nižná Polianka 65, Slovakia

Tel.: +421 905 560 158

E-mail: info@olejartactile.com

www.olejartactile.com

